

# S.O.F

World Leader in Supplying  
SPECIAL OPERATION FORCES Equipment and Training

## SCOPE X4-16

TA02026



### PRODUCT DESCRIPTION

The Raptor Scope gives hunters the long-range accuracy required to take home those coveted trophies. It allows hunters to make clean, precise shots at extended ranges, accurately calculating elevation and wind holds based on a combination of gun type, ammo, and environmental conditions. The Raptor offers a great reticle/optic combination to improve the capabilities of your favorite rifle for everyday use or those once-in-a-lifetime hunts.



\*Image is for illustration purposes only

### FEATURES

- Lightweight and tough aircraft-grade aluminum body
- Intentionally non-illuminated to comply with hunting regulations in many states
- High quality glass and coatings typically found in premium scopes
- Smooth side parallax adjustment for fine precision
- Turret covers protect against the elements and unintentional adjustments
- Reticle grid enables rapid Second Shot Correction


ONE STOP SHOP

#### CONTACT US

+972.3.691.4564 +972.3.691.4567 @ tar@tarideal.com www.tarideal.com  
20 Zvi Bergman St. Petah Tikva, 4927976, Israel

# S.O.F

World Leader in Supplying  
SPECIAL OPERATION FORCES Equipment and Training

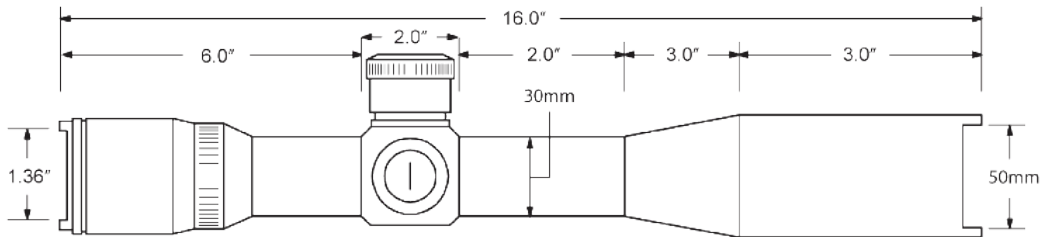

## Scope Specifications

Power . . . . . 4-16x  
Length . . . . . 16.0" (40.6 cm)  
Weight . . . . . 27.5 oz (780 g)  
Tube Diameter . . . . . 30mm  
Wall Thickness . . . . . 1.5mm  
Material . . . . . aluminum 6061-T,  
340 HV Hardness  
  
Tube . . . . . 1 piece  
Color . . . . . black  
Exterior Finish . . . . . matte anodized  
Shockproof . . . . . 1200 g  
Water-resistant . . . . . yes (3 meters)  
Dustproof . . . . . yes  
Fogproof . . . . . yes  
Warranty . . . . . 1 year limited  
Twilight Factor . . . . . 14.1 @ 4x - 28.3 @ 16x  
Reticle . . . . . H59, TReMoR2, or H25  
Reticles . . . . . 1st Focal Plane  
Reticle Illumination . . . . . no  
Lenses . . . . . 11 + reticle

Lens Coating . . . . . multi-coated  
Objective Lens . . . . . 50mm  
Field of View . . . . . 5.5 - 2.3 m (at 100m)  
Eye Relief . . . . . 4.3" - 3.5" (109-89mm)  
Exit Pupil . . . . . 12.5 - 3.1 mm  
Ocular Type . . . . . rapid European focus  
Diopter Adjustment . . . . . more than (-2,+1)  
Elevation Increment . . . . . 1 click = .10 mil radian  
Elevation Adj. Range . . . . . more than 16.3 MILS  
(59 MOA)  
Windage Increments . . . . . 1 click = .10 mil radian  
Windage Adj. Range . . . . . more than 16.3 MILS  
(59 MOA)  
Turret Caps . . . . . yes  
Turret Type . . . . . high  
Power Selector Style . . . . . tactile power indicator  
Parallax . . . . . side parallax variable 50  
m to infinity

## Optional Accessories

Sun Shade . . . . . 3" (76 mm)(thread size:  
M52x0.75 mm)  
Flashkill (length) . . . . . 3.03" (77 mm)  
ASLI

# S.O.F

World Leader in Supplying  
**SPECIAL OPERATION FORCES** Equipment and Training



## H25 Reticle Specifications

Distance . . . . . to 1500+ yards,  
depending on ammo  
Illumination . . . . . non-illuminated reticle  
Horizontal Crosshair . . . . thin lined, calibrated  
in 0.2 mil graduations  
Range Finder. . . . . reverse “L” SMOA\*\*  
Central Targeting Grid . . . calibrated in USMC mils\*  
H59 Reticle Specifications

## H59 Reticle Specifications

Distance . . . . . to 2000+ yards, depending on ammo  
Illumination . . . . . non-illuminated reticle  
Horizontal Crosshair . . . . thin lined, calibrated  
in 0.2 mil graduations  
Range Finder. . . . . none, use central grid  
calibrated in mils  
Central Targeting Grid . . . calibrated in USMC mils\*  
TReMoR2 Reticle Specifications

## TReMoR2 Reticle Specifications

Distance . . . . . to 1500+ yards, depending on ammo  
Illumination . . . . . non-illuminated reticle  
Horizontal Crosshair . . . . thin lined, calibrated  
in 0.2 mil graduations  
Range Finder. . . . . none, use central grid  
calibrated in mils  
Central Targeting Grid . . . calibrated in USMC mils\*